



# CRUSHER BUCKET BF135.8



A

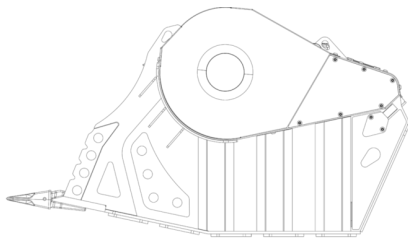

B



## SPECIFICATIONS



|                       |                |           |
|-----------------------|----------------|-----------|
| Recommended excavator | ton            | 43 - 80   |
| Weight                | ton            | 75        |
| Load capacity         | m <sup>3</sup> | 1.8       |
| Pressure              | bar            | 230 - 280 |
| Back pressure         | bar            | < 10      |
| Oil flow rate*        | l/min          | 320 - 380 |
| Crusher mouth width   | mm             | 1300      |
| Crusher mouth height  | mm             | 600       |
| Size A                | mm             | 1880      |
| Size B                | mm             | 3000      |
| Size C                | mm             | 1700      |

\* The minimum hydraulic flow rate value must be alongside the required operating pressure.

## OPTIONAL ACCESSORIES

|                      |                   |
|----------------------|-------------------|
| Dust suppression kit | Hour meter        |
| 24 V Iron Separator  | 24 Month Warranty |

## APPLICATION AREAS

