



SHAFTS SCREENER
MB-HDS323



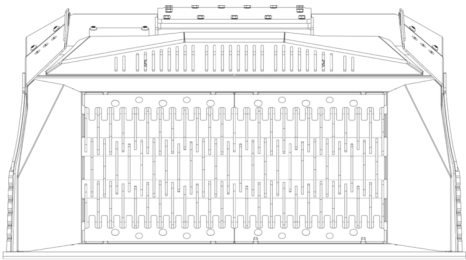

A

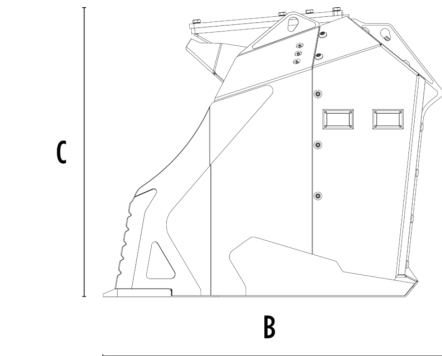

B







SPECIFICATIONS

	Recommended excavator	ton	22 - 35
	Recommended backhoe loader/loader*	ton	12 - 16
	Weight	ton	2,4
	Load capacity	m³	1,65 - 2,00**
	Load capacity with coal capacity increase kit	m³	2,00 - 2,40**
	Pressure	bar	250 - 300
	Oil flow rate***	l/min	120 - 160
	Size A	mm	2330
	Size B	mm	1500
	Size C	mm	1250

* Please verify machine's Rated Operating Capacity.
** The value of the load capacity varies according to the type of material being processed.
*** The minimum hydraulic flow rate value must be alongside the required operating pressure.

SHAFT KIT

KIT	APPLICATION
 RQ20 Sifting kit RQ50 Sifting kit	Sifting damp/dry soil Soil Aeration
 RM Mixer kit	Coal reduction Soil Aeration Compost Aeration Glass reduction Drywall reduction
 RE16 Fine sifting kit	Sifting damp/dry soil
 RC Compost kit	Shredding foliage and small branches Composting

* Shafts in closed position.

OPTIONAL ACCESSORIES

Shaft holder	24 Month Warranty
--------------	-------------------

APPLICATION AREAS


Road works


Quarry


Mines


Tunnels


Enclosed spaces


Pipelines


Inert material recycling


Excavations


Urban construction sites


Foundries


Maintaining landscape and agricultural areas