



# SCREENING BUCKET MB-S14 S4



A

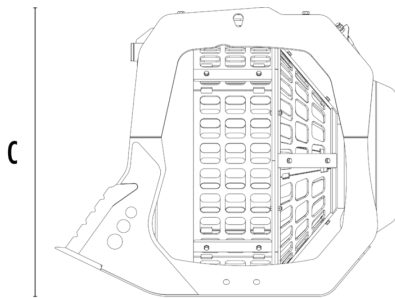

B



## SPECIFICATIONS



Recommended excavator	ton	9 - 20
Weight	ton	1,1
Load capacity	m <sup>3</sup>	1.1
Pressure	bar	150 - 200
Back pressure	bar	< 20
Oil flow rate*	l/min	60 - 80
Basket diameter	mm	1200
Basket depth	mm	900
Size A	mm	1400
Size B	mm	1700
Size C	mm	1440

\* The minimum hydraulic flow rate value must be alongside the required operating pressure.

## OPTIONAL ACCESSORIES

Dust suppression kit	Hour meter
Basket protection kit	24 Month Warranty

## APPLICATION AREAS



Demolitions



Road works



Quarry



Mines



Tunnels



Enclosed spaces



Pipelines



Inert material recycling



Excavations



Urban construction sites



Foundries



Maintaining landscape and agricultural areas



Forest maintenance